

Interconnect Up to 32 BACnet/IP Servers

FEATURES

- Fully configurable BACnet/IP client
- BACnet/IP supports device, binary I/O/V, analog I/O/V, multi-state I/O/V, and character string value object types

Connect Up to 32 BACnet/IP Servers

The 460BC can move data between up to 32 BACnet/IP servers on your network.

Best of all, the product is made in the USA, always in stock, and comes with a five-year warranty.

How Do I Use the 460BC-N2E in My Application?

Use data manipulation to modify your data as you transfer it between devices. The manipulation fields allow up to three operations.

It really is that simple.

Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.

When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.



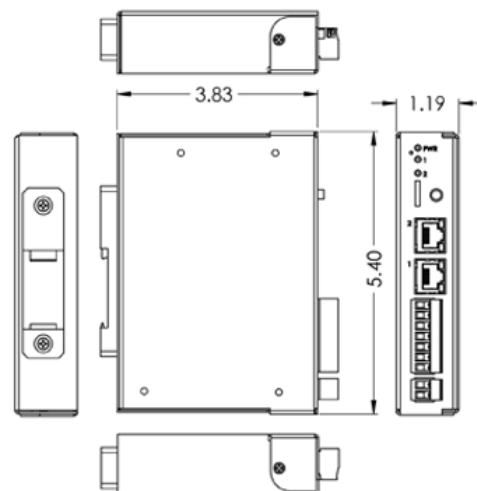
A Solution, A Philosophy, the RTA Way. We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience all the better. Thirty years later, our mission remains the same: **To move your data where you need it, when you need it, and how you need it.**

| BACnet/IP Client | |
|---|--|
| Operation Mode | BACnet/IP Client |
| Supported Object Types | Device, BI/BO/BV, AI/AO/AV, MI/MO/MV, Character String Value |
| Supported Service Codes | Read Property-A, Read Property Multiple-A, Write Property-A, Write Property Multiple-A, Device Dynamic Binding-A |
| Maximum Connections | 32 |
| Number Read/Write Scan Lines per Device | 200 Total - 100 reads & 100 writes |
| Scan Line Support | Up to 128 Objects |

| ELECTRICAL / ENVIRONMENTAL | |
|----------------------------|--|
| DC Input Voltage | 12-24 VDC |
| Maximum Baud Rate | 115K baud |
| Operating Temperature | -40 C to 85 C |
| Certification | RoHS-Compliant, UL, CUL, CE Approvals, Class I Div 2 |

| ENCLOSURE / HARDWARE | |
|----------------------|--|
| Size | 5.40" x 3.83" x 1.19" |
| Weight | 7.6 oz |
| Enclosure Type | Anodized Aluminum |
| Mounting | Din rail or panel mount |
| LEDs | Power LED & 2 general purpose LEDs on side |


| INCLUDED WITH GATEWAY | |
|--|--|
| 3' Power Cable with Flying leads | Manual |
| Complete, Unlimited Access to our Industry Leading Support Staff. | 5 Year Hardware Warranty |
| IPSetup software – Automatically locates RTA Gateway on the network | Unlimited Firmware Feature Upgrades for Life |
| CAT5 Cross over cable for direct connection to PC during programming | |

**NOT EXACTLY WHAT YOU WERE LOOKING FOR?**

Real Time Automation offers a full line of gateway products. Give us a call at 1-800-249-1612. Or, check out a listing at www.rtautomation.com/products. We also offer customizations for unique applications.

| CATALOG # | DESCRIPTION |
|-----------|------------------------------------|
| 460BC-N2E | Connect up to 32 BACnet/IP servers |



Made in the
U.S.A. 

Always In
Stock 

Ready to
Ship 

Expert
Support 