

CONTACT US! 1-800-249-1612 rtautomation.com

# 460BMQT-NNA1

### **BACnet MS/TP devices to MQTT**

#### FEATURES

- Fully configurable BACnet MS/TP master
- BACnet MS/TP supports device, binary I/O/V, analog I/O/V, multi-state I/O/V, and character string value object types
- Bring your factory data to the cloud
- Support for MQTT, AWS and Azure
- Effortless Browser Based Configuration, no programming software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- Guaranteed Stock
- 5-Year Hardware Warranty

#### **Connect BACnet MS/TP Devices to MQTT**

The 460BMQT moves data between up to 32 BACnet BACnet MS/TP devices and an MQTT application. Connect your BACnet MS/TP devices to cloud platforms such as AWS and Azure. Use the data to easily log data, build a dashboard or create a sophisticated alarm system.

Best of all, the product is made in the USA, always in stock, and comes with 5-year warranty.

#### How Do I Use the 460BMQT-NNA1 in My Application?


Analog and binary BACnet data values become topics published or subscribed to in an MQTT broker.

SSL transport layer security protects the data moving from your operations network to the cloud.

### Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.

When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.

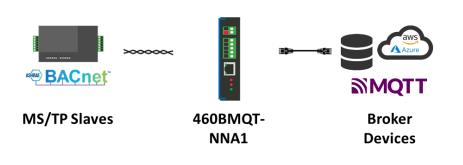

A Solution, A Philosophy, the RTA Way. We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience all the better. Thirty years later, our mission remains the same: To move your data where you need it, when you need it, and how you need it.

U.S.A.

## **Specification**

| BACnet MS/TP Master   |   |
|---|---|
| Operation Mode  | BACnet MS/TP Master Initiator   |
| Supported Object Types  | Device, BI/BO/BV, AI/AO/AV, MI/MO/MV, Character String Value  |
| Supported Service Codes   | Read Property-A, Read Property Multiple-A, Write Property-A, Write Property Multiple-A, Device<br>Dynamic Binding-A |
| Maximum Connections   | 32  |
| Number Read/Write Scan Lines per Device                             | 200 Total - 100 reads & 100 writes  |
| Scan Line Support   | Up to 128 Objects   |
| MQTT  |   |
| Operation Mode  | Generic MQTT, Amazon Web Services (AWS), Microsoft Azure  |
| Max Broker Connections  | Up to 3 Generic MQTT Connections, 1 AWS, 1 Azure  |
| Max Data Points Per Connection                                      | 1000 Read and 1000 Write Topics   |
| Security  | SSL certificate based cloud access  |
| Supported Data Formats  | JSON  |
| Data Payload  | Topic Name and Value  |
| INCLUDED WITH GATEWAY   |   |
| 3' power cable with flying leads                                    | 5-year hardware warranty  |
| IPSetup software – automatically locates RTA gateway on the network | Unlimited firmware feature upgrades for life  |
| CAT5 crossover cable for direct connection to PC during programming | Complete, unlimited access to our industry leading support staff  |
| Manual  |   |

#### **ELECTRICAL / ENVIRONMENTAL DC Input Voltage** 12-24 VDC 115K baud Maximum Baud Rate DIN Rail Mount Operating Temperature -40 C to 85 C Certification RoHS-Compliant, UL, CUL, CE Approvals 3.88 **ENCLOSURE / HARDWARE** 3.88" x 2.57" x 1.06" Size Weight 5.5 oz Enclosure Type Anodized Aluminum Mounting Din rail or panel mount 2.57 LEDs Power LED & 2 general purpose LEDs on side **GATEWAY FEATURES & FUNCTIONS** Note: All dimensions Set <, <=, >, >=, ==, !=, and change-of-state rules are in Inches on any data moving through the gateway. If alarm Alarming rule is triggered an email notification can be sent. 00000 You can configure up to 9 different users access to **Gateway Security** diagnostic and configuration screens. Allows for data manipulation during protocol WN. - N 1.06 **Translation Table** translation. Scaling and other data format changes can occur in the gateway. NOT EXACTLY WHAT YOU WERE LOOKING FOR? Protocol specific status, counters, and error Real Time Automation offers a full line of gateway products. messages are accessible within the gateway's Give us a call at 1-800-249-1612. Or, check out a listing at Status and Counters diagnostics page. They can also be delivered to a www.rtautomation.com/products. We also offer connected device. customizations for unique applications. Allows users to see and log start up sequences, **Diagnostic Logging Page** protocol specific messages & error messages.





solutions@rtautomation.com **Real Time Automation, Inc.** 

1-800-249-1612

Support