

CONTACT US! 1-800-249-1612 rtautomation.com

Real Time Automation Gateways

460BSWI-NNA1

Wireless Web Interface to BACnet/IP Client

FEATURES

- Fully configurable BACnet/IP server
- BACnet/IP supports device, binary I/O, analog I/O, and character string value object types
- Get PLC data table entries encoded in either JSON or XML
- Bidirectional data transfer supports both HTTP GET and POST
- Effortless Browser Based Configuration, no programming software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- Guaranteed Stock
- 5-Year Hardware Warranty

Access your BACnet/IP Building Management System from a Web Client over Wi-Fi

With the 460BSWI, it is easier than ever to monitor your BACnet/IP control system data via a web applications. Use that data to easily build a dashboard, archive data, or create a sophisticated alarm system. The gateway presents the data as JSON or XML files transferred via HTTP commands.

Best of all, the product is made in the USA, always in stock, and comes with 5-year warranty.

How Do I Use the 460BSWI-NNA1 in My Application?


First, you configure the 460BSWI using the browser-based configuration pages. You'll identify the data set to expose on BACnet. Once that's complete, you'll map, name and group the data to be presented as XML or JSON files.

Your application can issue standard HTTP GET or POST instructions to move data into your application. Up to 100 data points can be moved in each direction.

Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.

When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.

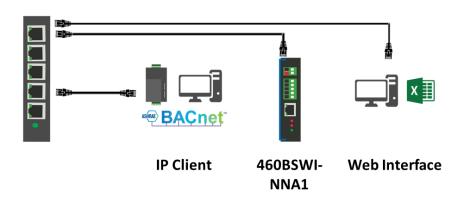

A Solution, A Philosophy, the RTA Way. We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience all the better. Thirty years later, our mission remains the same: To move your data where you need it, when you need it, and how you need it.

Specification

BACnet/IP Server	
Operation Mode	BACnet/IP Server
Supported Object Types	Device, Binary I/O, Analog I/O, Character String Value
Supported Service Codes	Read & Read Multiple-B, Write & Write Multiple-B, COV & COV unsolicited-B, Device Dynamic Binding-B, Dynamic Object Binding-B
Maximum Connections	1
Analog Objects Supported	1200 Input and 1200 Output
Binary Objects Supported	1600 Input and 1600 Output
Web Interface	
Max Web Interface Connections	One (gateway acting as client) / Unlimited (gateway acting as server)
Encodings	JSON and XML
Proxy Support	HTTP, SOCKS5 for Client
Maximum Number of Input Data Points	1000 JSON Fields or 1000 XML Tags
Maximum Number of Output Data Points	1000 JSON Fields or 1000 XML Tags
HTTP Services	Client: POST only; Server: GET and POST
INCLUDED WITH GATEWAY	
3' power cable with flying leads	5-year hardware warranty
IPSetup software – automatically locates RTA gateway on the network	Unlimited firmware feature upgrades for life
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff
Manual	

ELECTRICAL / ENVIRONMENTAL DC Input Voltage 12-24 VDC 115K baud Maximum Baud Rate DIN Rail Mount Operating Temperature -40 C to 85 C Certification RoHS-Compliant, UL, CUL, CE Approvals 3.88 **ENCLOSURE / HARDWARE** 3.88" x 2.57" x 1.06" Size Weight 5.5 oz Enclosure Type Anodized Aluminum Mounting Din rail or panel mount 2.57 LEDs Power LED & 2 general purpose LEDs on side **GATEWAY FEATURES & FUNCTIONS** Note: All dimensions Set <, <=, >, >=, ==, !=, and change-of-state rules are in Inches on any data moving through the gateway. If alarm Alarming rule is triggered an email notification can be sent. 00000 You can configure up to 9 different users access to **Gateway Security** diagnostic and configuration screens. Allows for data manipulation during protocol WN. - N 1.06 ōoo **Translation Table** translation. Scaling and other data format changes can occur in the gateway. NOT EXACTLY WHAT YOU WERE LOOKING FOR? Protocol specific status, counters, and error Real Time Automation offers a full line of gateway products. messages are accessible within the gateway's Status and Counters Give us a call at 1-800-249-1612. Or, check out a listing at diagnostics page. They can also be delivered to a www.rtautomation.com/products. We also offer connected device. customizations for unique applications. Allows users to see and log start up sequences, **Diagnostic Logging Page** protocol specific messages & error messages.

CATALOG #	DESCRIPTION
460BSWI-NNA1	Access your BACnet/IP building management system from a web client over wireless





Made in the

Stock

Always In





Real Time Automation, Inc.

solutions@rtautomation.com

1-800-249-1612