

460ECSC-NNA1

EtherNet/IP to Siemens S7 PLC

FEATURES

- Fully configurable
 EtherNet/IP scanner
- Map data from up to 32 EtherNet/IP adapters
- Supports connections to five Siemens S7 PLCs
- Up to 150 read and 150 write requests per connection
- Effortless Browser
 Based Configuration,
 no programming
 software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- Guaranteed Stock
- 5-Year Hardware Warranty

Connect EtherNet/IP Adapter Devices Directly to your S7 PLC

The 460ECSC moves data between EtherNet/IP adapters and up to five S7 PLCs.

Move data from your EtherNet/IP adapter device to S7 PLCs like the S7 300/400/1200/1500.

How Do I Use the 460ECSC-NNA1 in My Application?


Up to 496 bytes of EtherNet/IP data can be mapped in each direction from up to 32 devices. Once the data is manually entered for each EtherNet/IP connection the data is automatically mapped by the gateway for up to five S7 PLCs

It really is that simple.

Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.

When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.

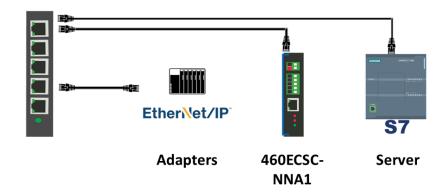

A Solution, A Philosophy, the RTA Way. We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience all the better. Thirty years later, our mission remains the same: To move your data where you need it, when you need it, and how you need it.

EtherNet/IP Scanner	
Operation Mode	Class 1 I/O Scanner
Message Support	Implicit Class 1 Cyclic I/O, Explicit not supported
Data Types	BIT8,16 & 32; INT8, 16, 32 & 64; UINT8,16, 32 & 64; Float & Double
Maximum EtherNet/IP Adapter Devices	32
Max Data Per Adapter Connection	Up to 496 bytes in each direction
Maximum IO Scan Rate	20 msec
S7 Client	
PLC Support	S7 300/400/1200/1500
Maximum Number of PLCs Supported	5
Maximum Number of Inputs/Outputs per PLC	150
Maximum Number of Bytes per Scan Line	400
Memory Area Access	Input (I), Output (Q), and Data Block(DB)
Supported Data Types	8 Bit Int, 16 Bit Int, 32 Bit Int, 32 Bit Float, Bool and Char Array
INCLUDED WITH GATEWAY	
3' power cable with flying leads	5-year hardware warranty
IPSetup software – automatically locates RTA gateway on the network	Unlimited firmware feature upgrades for life
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff
Manual	

ELECTRICAL / ENVIRONMENTAL			
DC Input Voltage	12-24 VDC		
Maximum Baud Rate	115K baud	DIN Rail Mount	
Operating Temperature	-40 C to 85 C		
Certification	RoHS-Compliant, UL, CUL, CE Approvals		
ENCLOSURE / HARDWARE		,	
Size	3.88" x 2.57" x 1.06"		
Weight	5.5 oz		
Enclosure Type	Anodized Aluminum		
Mounting	Din rail or panel mount	2.57	
LEDs	Power LED & 2 general purpose LEDs on side		
GATEWAY FEATURES & FUNCTIO			
Alarming	Set <, <=, >, >=, ==, !=, and change-of-state rules on any data moving through the gateway. If alarm rule is triggered an email notification can be sent.	l III	
Gateway Security	You can configure up to 9 different users access to diagnostic and configuration screens.		
Translation Table	Allows for data manipulation during protocol translation. Scaling and other data format changes can occur in the gateway.	1.06	
Status and Counters	Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device.	NOT EXACT Real Time Auto Give us a call a www.rtau custo	
Diagnostic Logging Page	Allows users to see and log start up sequences, protocol specific messages & error messages.		

	•	3.88
2.57	Note: All dimensions are in Inches	
		00000
1.06	- 7	

TLY WHAT YOU WERE LOOKING FOR?

tomation offers a full line of gateway products. at 1-800-249-1612. Or, check out a listing at automation.com/products. We also offer tomizations for unique applications.

CATALOG #	DESCRIPTION
460ECSC-NNA1	Connects up to 32 EtherNet/IP adapters with as many as five S7 PLCs



Made in the



Always In





