

EtherNet/IP to BACnet/IP Client

FEATURES

- Fully configurable EtherNet/IP adapter
- Supports up To 480 bytes of input and 480 bytes of output data
- Fully configurable BACnet/IP server
- BACnet/IP supports device, binary I/O, analog I/O, and character string value object types
- Effortless Browser Based Configuration, no programming software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- Guaranteed Stock
- 5-Year Hardware Warranty

Connect an EtherNet/IP PLC to a BACnet/IP Client

The 460ESBS moves data between a BACnet/IP client device and an EtherNet/IP PLC. It's the perfect tool to tie all the data from your factory floor into your building automation system. Featuring separate Ethernet network connections for your EtherNet/IP scanner and building automation network.

It's also a great tool to integrate those EtherNet/IP PLC-based HVAC and boilers machines that seems to pop up in building automation applications. The 460ESBS will make them appear like native BACnet/IP devices.

How Do I Use the 460ESBS-N2EW in My Application?


Up to 480 bytes of data from your EtherNet/IP PLC can be mapped to and from BACnet/IP. EtherNet/IP IO data structures are mapped to BACnet/IP analog and binary values.

Need to modify or scale your data as it passes from one protocol to the other? No problem. Each data mapping you apply can be modified with up to 3 mathematic functions. Add 4 to a value, multiply by 4 and divide by 10 with ease.

Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.


When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.

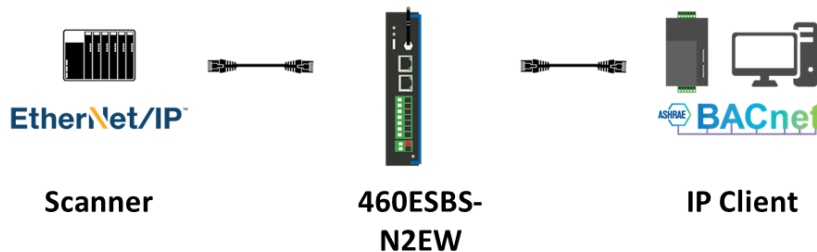

A Solution, A Philosophy, the RTA Way. We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience all the better. Thirty years later, our mission remains the same: **To move your data where you need it, when you need it, and how you need it.**

| | |
|---|---|
| EtherNet/IP Adapter | |
| Operation Mode | Class 1 I/O Adapter |
| Message Support | Implicit Class 1 Cyclic I/O, Explicit Class 3 and UCMM Supported |
| Data Types | BIT8, 16 & 32; INT8, 16, 32 & 64; UINT8, 16, 32 & 64; Float & Double |
| Maximum EtherNet/IP Scanner Devices | Up to 10 can listen, only 1 can write I/O |
| Maximum Data Supported | Up to 480 bytes in each direction |
| Maximum IO Scan Rate | 20 msec |
| BACnet/IP Server | |
| Operation Mode | BACnet/IP Server |
| Supported Object Types | Device, Binary I/O, Analog I/O, Character String Value |
| Supported Service Codes | Read & Read Multiple-B, Write & Write Multiple-B, COV & COV unsolicited-B, Device Dynamic Binding-B, Dynamic Object Binding-B |
| Maximum Connections | 1 |
| Analog Objects Supported | 1200 Input and 1200 Output |
| Binary Objects Supported | 1600 Input and 1600 Output |
| INCLUDED WITH GATEWAY | |
| 3' power cable with flying leads | 5-year hardware warranty |
| IPSetup software – automatically locates RTA gateway on the network | Unlimited firmware feature upgrades for life |
| CAT5 crossover cable for direct connection to PC during programming | Complete, unlimited access to our industry leading support staff |
| Manual | |

| | |
|---|--|
| ELECTRICAL / ENVIRONMENTAL | |
| DC Input Voltage | 12-24 VDC |
| Maximum Baud Rate | 115K baud |
| Operating Temperature | -40 C to 85 C |
| Certification | RoHS-Compliant, UL, CUL, CE Approvals, Class I Div 2 |
| ENCLOSURE / HARDWARE | |
| Size | 5.40" x 3.83" x 1.19" |
| Weight | 7.6 oz |
| Enclosure Type | Anodized Aluminum |
| Mounting | Din rail or panel mount |
| LEDs | Power LED & 2 general purpose LEDs on side |
| GATEWAY FEATURES & FUNCTIONS | |
| Alarming | Set <, <=, >, >=, ==, !=, and change-of-state rules on any data moving through the gateway. If alarm rule is triggered an email notification can be sent. |
| Gateway Security | You can configure up to 9 different users access to diagnostic and configuration screens. |
| Translation Table | Allows for data manipulation during protocol translation. Scaling and other data format changes can occur in the gateway. |
| Status and Counters | Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device. |
| Diagnostic Logging Page | Allows users to see and log start up sequences, protocol specific messages & error messages. |

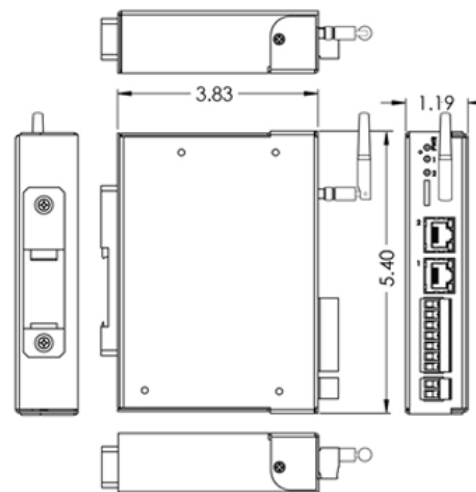

NOT EXACTLY WHAT YOU WERE LOOKING FOR?
 Real Time Automation offers a full line of gateway products. Give us a call at 1-800-249-1612. Or, check out a listing at www.rtautomation.com/products. We also offer customizations for unique applications.

| CATALOG # | DESCRIPTION |
|--------------|---|
| 460ESBS-N2EW | Connects an EtherNet/IP scanner with a BACnet/IP client |



Made in the
U.S.A. 

Always In
Stock 

Ready to
Ship 

Expert
Support 