CONTACT US!

1-800-249-1612 rtautomation.com

Real Time Automation Gateways

460ETCUS-N2E

Allen-Bradley PLC to OPC UA

FEATURES

- Supports connection to five Allen-Bradley PLCs
- Up to 150 tag or file arrays of data can be mapped in each direction
- Fully configurable OPC
 UA server
- Up to 10 read and write groups with up to 200 nodes per group
- Effortless Browser
 Based Configuration,
 no programming
 software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- Guaranteed Stock
- 5-Year Hardware Warranty

Access Allen-Bradley PLCs via OPC UA

The 460ETCUS moves data between Allen-Bradley PLCs and up to three OPC UA clients.

Best of all, the product is made in the USA, always in stock, and comes with 5-year warranty.

How Do I Use the 460ETCUS-N2E in My Application?


You define and inbound and outbound blocks of tags in the data table of your PLC. Tag or register data from the Allen-Bradley PLC is mapped to OPC nodes. The data moves bidirectionally.

It's really that simple to convert data to the information systems you need to monitor your application.

Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.

When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.

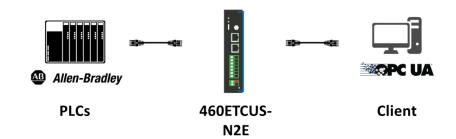


A Solution, A Philosophy, the RTA Way. We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience all the better. Thirty years later, our mission remains the same: To move your data where you need it, when you need it, and how you need it.

Specification

Ethernet Tag Client		
PLC Support	ControlLogix, CompactLogix, FlexLogix, MicroLogix, SLCs and PLC5Es	
Maximum Number of PLCs Supported	5	
Maximum Number of Input/Output Tags or Files per PLC	150	
Maximum Number of Bytes per PLC Tag	400	
Array Support	Yes, for all data types except strings	
Supported Data Types	Usint, Sint, Uint, Int, Udint, Dint, Real, String, Bit Array 16, Bit Array 32, Bool, and Long	
OPC UA Client		
Operation Mode	OPC UA Server	
Simultaneous Connections Supported	3	
Max number of Input Nodes per Node Type	200	
Max number of Output Nodes per Node Type	200	
Array Support	Boolean,64 Bit Integer, 64 Bit Unsigned Int and 64 bit Float	
Profiles Supported	UA 1.03 Micro Embedded Server and Data Access	
INCLUDED WITH GATEWAY		
3' power cable with flying leads	5-year hardware warranty	
IPSetup software – automatically locates RTA gateway on the network	Unlimited firmware feature upgrades for life	
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff	
Manual		

ELECTRICAL / ENVIRONMENTAL			
DC Input Voltage	12-24 VDC		
Maximum Baud Rate	115K baud		
Operating Temperature	-40 C to 85 C		
Certification	RoHS-Compliant, UL, CUL, CE Approvals, Class I Div 2		
ENCLOSURE / HARDWARE			
Size	5.40" x 3.83" x 1.19"		
Weight	7.6 oz		
Enclosure Type	Anodized Aluminum		
Mounting	Din rail or panel mount		
LEDs	Power LED & 2 general purpose LEDs on side		
GATEWAY FEATURES & FUNCTIONS			
Alarming	Set <, <=, >, >=, ==, !=, and change-of-state rules on any data moving through the gateway. If alarm rule is triggered an email notification can be sent.		
Gateway Security	You can configure up to 9 different users access to diagnostic and configuration screens.		
Translation Table	Allows for data manipulation during protocol translation. Scaling and other data format changes can occur in the gateway.		
Status and Counters	Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device.	i	
Diagnostic Logging Page	Allows users to see and log start up sequences, protocol specific messages & error messages.		

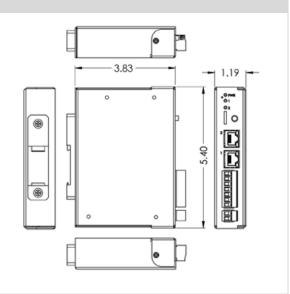

NOT EXACTLY WHAT YOU WERE LOOKING FOR?
Real Time Automation offers a full line of gateway products.
Give us a call at 1-800-249-1612. Or, check out a listing at
www.rtautomation.com/products. We also offer
customizations for unique applications.

	CATALOG #	DESCRIPTION
	460ETCUS-N2E	Connect up to five Allen-Bradley PLCs to OPC UA



Made in the

U.S.A.



Always In

Stock





