CONTACT US!

1-800-249-1612 rtautomation.com

Real Time Automation Gateways

460MCMRS-N700

Wireless Modbus RTU to Modbus TCP/IP

FEATURES

- Fully configurable Modbus TCP/IP client
- Connects up to 32
 Modbus TCP/IP servers
- Fully configurable Modbus RTU slave
- Move up to 100 groups of 512 contiguous coils or 512 contiguous registers to or from your Modbus RTU master
- Effortless Browser
 Based Configuration,
 no programming
 software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- Guaranteed Stock
- 5-Year Hardware Warranty

Get Your Modbus RTU Master connected to Modbus TCP/IP Servers Devices over Wi-Fi

The 460MCMRS moves data between up to 32 Modbus TCP/IP server devices and a Modbus RTU master device. With the 460MCMRS, register and coil data can be freely moved between your Modbus RTU and Modbus TCP/IP networks.

Best of all, the product is made in the USA, always in stock, and comes with 5-year warranty.

How Do I Use the 460MCMRS-N700 in My Application?


To your Modbus TCP/IP server devices, the gateway will act as a Modbus TCP/IP client. To your Modbus RTU master device, the gateway acts as a Modbus RTU slave. In the gateway, you configure what data will be passed between the networks.

In the translation, you are able to map register and coil data from any device to any other device connected to the gateway.

Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.

When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.

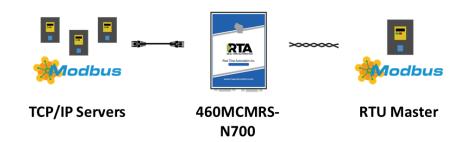

A Solution, A Philosophy, the RTA Way. We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience all the better. Thirty years later, our mission remains the same: To move your data where you need it, when you need it, and how you need it.

Modbus TCP Client	
Operation Mode	Modbus TCP/IP Client
Function Codes Supported	1,2,3,4,5,6, 15 & 16
Swapping	Byte and Word Swapping
Maximum Modbus TCP/IP Server Devices	32
Number Read/Write Scan Lines per Server Device	200 Total - 100 reads & 100 writes
Scan Line Support	Up to 125 Registers or 512 Coils
Modbus RTU Slave	
Operation Mode	Modbus RTU Slave
Function Codes Supported	1,2,3,4,5,6, 15 & 16
Swapping	Byte and Word Swapping
Maximum Modbus RTU Master Connections	1
Contiguous Data Areas	200 Total - 100 reads & 100 writes
Data Area Limits	512 Contiguous Coils or 512 Contiguous Registers
INCLUDED WITH GATEWAY	
3' power cable with flying leads	5-year hardware warranty
IPSetup software – automatically locates RTA gateway on the network	Unlimited firmware feature upgrades for life
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff
Manual	

ELECTRICAL / ENVIRONME	NTAL	
DC Input Voltage	12-24 VDC	
Maximum Baud Rate	115K baud	
Operating Temperature	-40 C to 85 C	b (s)
Certification	RoHS-Compliant, UL, CUL, CE Approvals	
ENCLOSURE / HARDWARE		Ithernet & &
Size	4.19" x 3.25" x 1"	p 8
Weight	6.5 oz	3,26
Enclosure Type	Anodized Aluminum	
Mounting	Din rail or panel mount	Note: All dimension
LEDs	Power LED, Ethernet link/data LED, & Ethernet speed LED	are n inches
GATEWAY FEATURES & FU	JNCTIONS	419
Alarming	Set <, <=, >, >=, ==, !=, and change-of-state rules on any data moving through the gateway. If alarm rule is triggered an email notification can be sent.	Din Rail
Gateway Security	You can configure up to 9 different users access to diagnostic and configuration screens.	Panel Mount
Translation Table	Allows for data manipulation during protocol translation. Scaling and other data format changes can occur in the gateway.	••••
Status and Counters	Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device.	NOT EXACTLY WHAT YOU WERE LOOKING FOR? Real Time Automation offers a full line of gateway products. Give us a call at 1-800-249-1612. Or, check out a listing at www.rtautomation.com/products . We also offer customizations for unique applications.
Diagnostic Logging Page	Allows users to see and log start up sequences, protocol specific messages & error messages.	
OATALOO "	DESCRIPTION	5

CATALOG #	DESCRIPTION
460MCMRS-N700	Connects up to 32 Modbus TCP servers with a Modbus RTU master over wireless



Made in the

U.S.A.



Always In







