

CONTACT US! 1-800-249-1612 rtautomation.com

460BMQT-N2E

BACnet MS/TP devices to MQTT

FEATURES

- Fully configurable BACnet MS/TP master
- BACnet MS/TP supports device, binary I/O/V, analog I/O/V, multi-state I/O/V, and character string value object types
- Bring your factory data to the cloud
- Support for MQTT, AWS and Azure
- Effortless Browser Based Configuration, no programming software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- Guaranteed Stock
- 5-Year Hardware Warranty

Connect BACnet MS/TP Devices to MQTT

The 460BSQT moves data between a BACnet/IP building automation control system and a MQTT applications. Connect your BACnet/IP BMS to cloud platforms such as AWS and Azure. Use the data to easily log data, build a dashboard or create a sophisticated alarm system.

Best of all, the product is made in the USA, always in stock, and comes with 5-year warranty.

How Do I Use the 460BMQT-N2E in My Application?


Analog and binary BACnet data values become topics published or subscribed to in an MQTT broker.

SSL transport layer security protects the data moving from your operations network to the cloud.

Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.

When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.

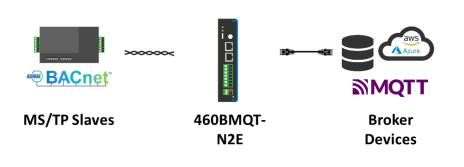

A Solution, A Philosophy, the RTA Way. We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience all the better. Thirty years later, our mission remains the same: To move your data where you need it, when you need it, and how you need it.


Specification

BACnet MS/TP Master		
Operation Mode	BACnet MS/TP Master Initiator	
Supported Object Types	Device, BI/BO/BV, AI/AO/AV, MI/MO/MV, Character String Value	
Supported Service Codes	Read Property-A, Read Property Multiple-A, Write Property-A, Write Property Multiple-A, Device Dynamic Binding-A	
Maximum Connections	32	
Number Read/Write Scan Lines per Device	200 Total - 100 reads & 100 writes	
Scan Line Support	Up to 128 Objects	
MQTT		
Operation Mode	Generic MQTT, Amazon Web Services (AWS), Microsoft Azure	
Max Broker Connections	Up to 3 Generic MQTT Connections, 1 AWS, 1 Azure	
Max Data Points Per Connection	1000 Read and 1000 Write Topics	
Security	SSL certificate based cloud access	
Supported Data Formats	JSON	
Data Payload	Topic Name and Value	
INCLUDED WITH GATEWAY		
3' power cable with flying leads	5-year hardware warranty	
IPSetup software – automatically locates RTA gateway on the network	Unlimited firmware feature upgrades for life	
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff	
Manual		

DC Input Voltage 12-24 VDC Maximum Baud Rate 115K baud **Operating Temperature** -40 C to 85 C RoHS-Compliant, UL, CUL, CE Approvals, Class Certification I Div 2 ENCLOSURE / HARDWARE 5.40" x 3.83" x 1.19" Size Weight 7.6 oz Enclosure Type Anodized Aluminum Mounting Din rail or panel mount

ELECTRICAL / ENVIRONMENTAL

LEDs	Power LED & 2 general purpose LEDs on side	
GATEWAY FEATURES & FUNCTIONS		
Alarming	Set <, <=, >, >=, ==, !=, and change-of-state rules on any data moving through the gateway. If alarm rule is triggered an email notification can be sent.	
Gateway Security	You can configure up to 9 different users access to diagnostic and configuration screens.	
Translation Table	Allows for data manipulation during protocol translation. Scaling and other data format changes can occur in the gateway.	
Status and Counters	Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device.	
Diagnostic Logging Page	Allows users to see and log start up sequences, protocol specific messages & error messages.	



NOT EXACTLY WHAT YOU WERE LOOKING FOR? Real Time Automation offers a full line of gateway products. Give us a call at 1-800-249-1612. Or, check out a listing at www.rtautomation.com/products. We also offer customizations for unique applications.

Expert

Support

CATALOG #	DESCRIPTION
460BMQT-N2E	Connect up to 32 BACnet MS/TP devices to MQTT



Made in the







Ready to

Ship

1-800-249-1612

Real Time Automation, Inc.