rtautomation.com

460ESMM-NNA1

Modbus RTU Slaves to EtherNet/IP

FEATURES

- Fully configurable EtherNet/IP adapter
- Supports up To 480 bytes of input and 480 bytes of output data
- Fully configurable Modbus RTU master
- Connects up to 32
 Modbus RTU slaves
- Effortless Browser
 Based Configuration,
 no programming
 software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- Guaranteed Stock
- 5-Year Hardware Warranty

Connect Modbus RTU Slaves to an EtherNet/IP Scanner

The 460ESMM connects up to 32 Modbus RTU slaves to an EtherNet/IP controller. It's the perfect tool to save legacy Modbus RTU devices from the scrap pile and utilize the huge variety of Modbus RTU devices available in your EtherNet/IP architectures.

Best of all, the product is made in the USA, always in stock, and comes with 5-year warranty.

How Do I Use the 460ESMM-NNA1 in My Application?


Modbus register and coil data is mapped to EtherNet/IP IO data blocks. EtherNet/IP data is mapped directly to your Modbus RTU slaves. Up to 480 bytes of data can be moved in each direction between Modbus RTU and EtherNet/IP.

It really is that simple.

Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.


When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.

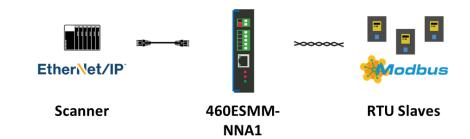

A Solution, A Philosophy, the RTA Way. We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience all the better. Thirty years later, our mission remains the same: To move your data where you need it, when you need it, and how you need it.

EtherNet/IP Adapter	
Operation Mode	Class 1 I/O Adapter
Message Support	Implicit Class 1 Cyclic I/O, Explicit Class 3 and UCMM Supported
Data Types	BIT8,16 & 32; INT8, 16, 32 & 64; UINT8,16, 32 & 64; Float & Double
Maximum EtherNet/IP Scanner Devices	Up to 10 can listen, only 1 can write I/O
Maximum Data Supported	Up to 480 bytes in each direction
Maximum IO Scan Rate	20 msec
Modbus RTU Master	
Operation Mode	Modbus RTU Master
Function Codes Supported	1,2,3,4,5,6, 15 & 16
Swapping	Byte and Word Swapping
Maximum Modbus RTU Slave Devices	32
Number Read/Write Scan Lines per RTU Slave Device	200 Total - 100 reads & 100 writes
Scan Line Support	Up to 125 Registers or 512 Coils
INCLUDED WITH GATEWAY	
3' power cable with flying leads	5-year hardware warranty
IPSetup software – automatically locates RTA gateway on the network	Unlimited firmware feature upgrades for life
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff
Manual	

12-24 VDC	
115K baud	
-40 C to 85 C	
RoHS-Compliant, UL, CUL, CE Approvals	
3.88" x 2.57" x 1.06"	
5.5 oz	
Anodized Aluminum	
Din rail or panel mount	
Power LED & 2 general purpose LEDs on side	
ONS CONTRACTOR OF THE PROPERTY	
Set <, <=, >, >=, ==, !=, and change-of-state rules on any data moving through the gateway. If alarm rule is triggered an email notification can be sent.	
You can configure up to 9 different users access to diagnostic and configuration screens.	
Allows for data manipulation during protocol translation. Scaling and other data format changes can occur in the gateway.	
Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device.	i
Allows users to see and log start up sequences, protocol specific messages & error messages.	
	115K baud -40 C to 85 C RoHS-Compliant, UL, CUL, CE Approvals 3.88" x 2.57" x 1.06" 5.5 oz Anodized Aluminum Din rail or panel mount Power LED & 2 general purpose LEDs on side INS Set <, <=, >, >=, ==, !=, and change-of-state rules on any data moving through the gateway. If alarm rule is triggered an email notification can be sent. You can configure up to 9 different users access to diagnostic and configuration screens. Allows for data manipulation during protocol translation. Scaling and other data format changes can occur in the gateway. Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device. Allows users to see and log start up sequences,

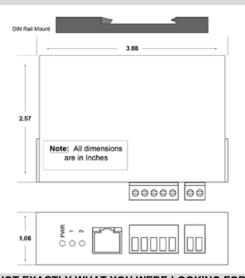

NOT EXACTLY WHAT YOU WERE LOOKING FOR?

Real Time Automation offers a full line of gateway products. Give us a call at 1-800-249-1612. Or, check out a listing at www.rtautomation.com/products. We also offer customizations for unique applications.

CATALOG #	DESCRIPTION
460ESMM-NNA1	Connects an EtherNet/IP scanner with as many as 32 Modbus RTU slaves



Made in the

U.S.A.



Always In

Stock





